




## THRIVE™ Full Synthetic Engine Oils

### Description

**THRIVE™** Full Synthetic Engine Oils use an advanced passenger car motor oil technology designed to meet the needs of today's modern gasoline engines. They are formulated with the highest quality additives and base oils and are designed to meet or exceed the demands of turbocharged (TGDI), gasoline-fueled and flex-fuel passenger cars, light trucks and sport utility vehicles, including gasoline-electric hybrids.

**THRIVE™** Synthetic Engine Oils formulated to provide superior anti-wear protection and enhanced high temperature performance to resist oxidation breakdown and sludge.

**THRIVE™** Engine Oils exceed the industry engine performance requirements for the API Engine Oil Licensing and Certification System (EOLCS). This includes recently updated industry standards API SP and ILSAC GF-6 and acceptable for new car warranty requirements.

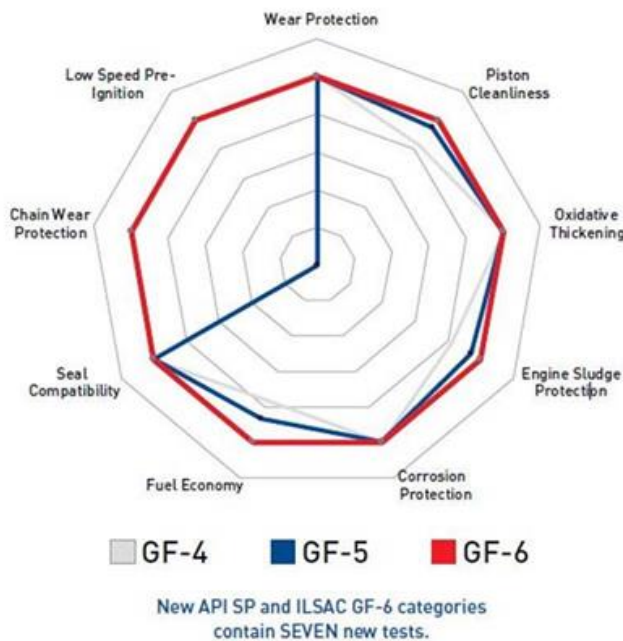

### Features/Benefits

- ✓ **Advanced Cleaning Action**  
Cleans sludge and dirt deposits off surfaces for peak running condition
- ✓ **Advanced Wear Protection**  
Controls the potential timing wear in modern TGDI engines
- ✓ **Advanced Temperature Control**  
Provides low temperature pumpability for protection during cold starts
- ✓ **Advanced Pre-Ignition Protection**  
Offers additional level of protection against previous specifications
- ✓ **Advanced Emission Control**  
Formulated to protect emissions control system catalysts
- ✓ **Incredible Warranty**  
10-year/300,000 mile warranty program to attract new business and build loyalty
- ✓ **Exceptional Value**  
Premium quality product without the national brand price

## THRIVE™ Full Synthetic Engine Oils

### Applications

THRIVE™ Synthetic Engine Oils meet the API requirements for SP, Resource Conserving, and ILSAC GF-6. They also meet the OEM specifications required for Toyota, Honda, Nissan, and Hyundai.

### Performance Properties

Product Number	Viscosity Grade	Industry Performance Standards
03	0W-16	API SP, GF-6B, Chrysler MS-6395S
52	5W-20	API SP, GF-6A, GM 6094M, Ford WSS-M2C945-A, Chrysler MS-6395N
35	10W-30	API SP GF-6A, GM 4718M, GM 6094M, Chrysler MS-6395N

### Typical Physical and Chemical Specifications

Property	10W-30	0W-16	5W-20
Viscosity @ 100°C, CSt	10.59	7.40	8.54
Viscosity @ 40°C, CSt	65.78	37.75	47.15
Viscosity Index	150	166	160.5
Specific Gravity 15.6°C (60°F)	0.8495	0.8412	0.8471
Pour Point, °C (°F)	-45	-51	-45
Flash Point, °C (°F)	205	206	215
Color ATSM	3	3	3
CCS	3700	4300	3500
NOACK Volatility	4.50	10.00	9.60
TBN	7.10	7.00	7.00

**For Complete Engine Health™**

For more information, visit [www.uslube.com](http://www.uslube.com) or call 800-490-4900.