

THRIVE® Syn Blend High Mileage Engine Oils

ILSAC GF-7 / API SQ

THRIVE® Syn Blend High Mileage Engine Oils utilize the latest additive technology to protect moving component surfaces from wear. The detergent and dispersant package utilized in the formulations protects the engine system from sludge, foreign contaminants, and other harmful deposit build up.

THRIVE® Syn Blend High Mileage Engine Oils provide the latest technology in fuel economy standards while also maintaining best in class wear control, cleanliness, and oxidation control. Specially formulated with a custom anti-wear booster for engines with over 75,000 miles, these oils provide a significant reduction in wear rate.

THRIVE® Syn Blend High Mileage Engine Oils meet or exceed the API SQ and ILSAC GF-7A performance specifications and are backward compatible with other API S category oils such as API SP, SN Plus, SN, and older.




FEATURES/BENEFITS

THRIVE® Syn Blend High Mileage Engine Oils contain industry leading additives that promote exceptional performance.

- Excellent Protection Against Wear**
 The technology used in our high mileage engine oils results in significantly stronger wear control (up to 100%) than those of competitors
- Up to 70% Better Oxidation Control**
 Ensures versatile application across multiple base oils and vis-grades, ensuring outstanding protection against thermal degradation to extend the useful life of the oil
- Up to 9% Improved Fuel Economy**
 Performance that meets or exceeds specification requirements, resulting in greater sustainability during the operation of the vehicle for positive economic and environmental impact
- Exceptional Value for Less**
 THRIVE is a quality product that's undergone the same rigorous tests as well-known brands, without the name-brand price

Performance of THRIVE ILSAC GF-7 vs. Specification

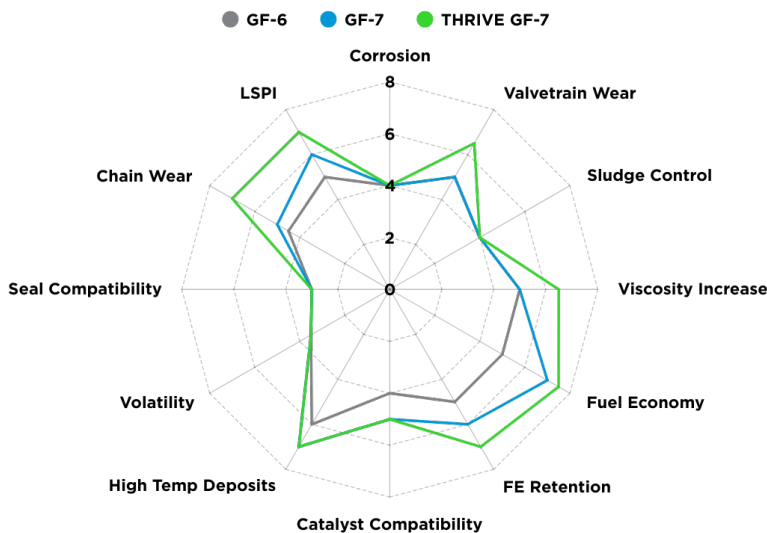



THRIVE® Syn Blend High Mileage Engine Oils

ILSAC GF-7 / API SQ

Rev. 5/2025

Performance Properties		
Product Number (Bulk)	Viscosity Grade	Industry Performance Standards
100-017	5W-20	ILSAC GF-7A, API SQ Resource Conserving
100-015	5W-30	ILSAC GF-7A, API SQ Resource Conserving
100-016	10W-30	ILSAC GF-7A, API SQ Resource Conserving

Note: Backwards compability to other S categories

Typical Physical and Chemical Specifications			
Property – SAE Grade	5W-20	5W-30	10W-30
Viscosity @ 40°C, cSt	48.2	59.5	71.6
Viscosity @ 100°C, cSt	8.5	10.2	10.7
Viscosity Index	154	160	138
Cold Crank Simulator, cP	4,629 (-30°C)	5,243 (-30°C)	6,052 (-25°C)
Low Temperature Pumping, cP	13,300 (-35°C)	17,400 (-30°C)	19,200 (-30°C)
HTHS Viscosity @ 150°C, cP	2.6	3	3.2
Pour Point, °C	-42	-42	-34
Flash Point, °C	203	202	201
Density @ 15°C, lb/gal	7.13	7.14	7.25
TBN, mg KOH/g	7.9	7.9	7.9

Note: Actual properties will vary by regionality and due to batch by batch fluctuation.

For Complete Engine Health®

For more information, visit www.uslube.com or call 800-490-4900