

# THRIVE® Full Syn dexos™1 Gen3 Engine Oils

## Premium Full Synthetic GM-Approved Engine Oils




**THRIVE® Full Syn dexos™1 Gen3 Engine Oils** utilize the latest additive technology to protect moving component surfaces from wear. The detergent and dispersant package utilized in the formulations protects the engine system from sludge, foreign contaminants, and other harmful deposit build up.

**THRIVE® Full Syn dexos™1 Gen3 Engine Oils** provide the latest technology in fuel economy standards while also maintaining best in class wear control, cleanliness, and oxidation control. Formulated using synthetic base oil, these oils offer superior protection and performance.

**THRIVE® Full Syn dexos™1 Gen3 Engine Oils** meet or exceed the API SQ and ILSAC GF-7 performance specifications and are backward compatible with other API S category oils such as API SP, SN Plus, SN, and older. All products in this line are **approved and licensed by GM** for use in all their gasoline powered vehicles.

### Performance of THRIVE ILSAC GF-7 vs. Specification

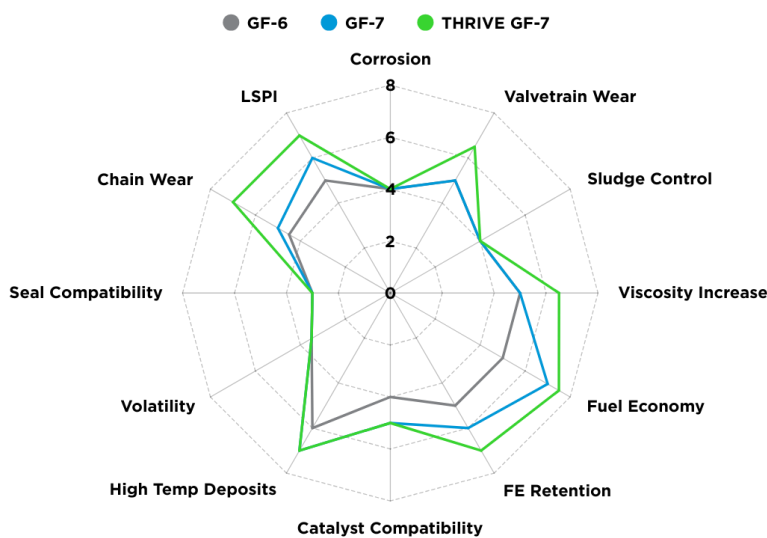

### Features/Benefits

- Excellent Protection Against Wear**  
 Performance that meets or exceeds the ILSAC GF-7 specification to extend engine component lifespan
- Up to 70% Better Oxidation Control**  
 Ensures versatile application across multiple base oils and vis-grades, ensuring outstanding protection against thermal degradation to extend the useful life of the oil
- Up to 9% Improved Fuel Economy**  
 Performance that meets or exceeds specification requirements, resulting in greater sustainability during the operation of the vehicle for positive economic and environmental impact
- Exceptional Value for Less**  
 THRIVE is a quality product that's undergone the same rigorous tests as well-known brands, without the name-brand price





# THRIVE® Full Syn dexos™ 1 Gen3 Engine Oils

Premium Full Synthetic GM-Approved Engine Oils

Rev. 11/2025

Performance Properties		
Product Number (Bulk)	Viscosity Grade	Industry Performance Standards
200-005D	0W-20	dexos1 Gen 3, ILSAC GF-7A, API SQ Resource Conserving, Ford WSS-M2C972-A1
200-055D	5W-30	dexos1 Gen 3, ILSAC GF-7A, API SQ Resource Conserving, Ford WSS-M2C971-A1

Note: Suitable for use in Stellantis MS-6395 in applicable viscosity grades, backwards compatibility to other S categories

Typical Physical and Chemical Specifications		
Property – SAE Grade	0W-20	5W-30
Viscosity @ 40°C, cSt	42.5	52.4
Viscosity @ 100°C, cSt	8.4	9.6
Viscosity Index	178	170
Specific Gravity at 60°F (15.6°C)	0.842	0.845
Cold Crank Simulator, cP	4,583 (-35°C)	3,634 (-30°C)
Noack Volatility, %	10.7	8.7
TBN, mg KOH/g	7.0	7.0

Note: Actual properties will vary by regionality and due to batch by batch fluctuation.

**For Complete Engine Health®**

For more information, visit [www.uslub.com](http://www.uslub.com) or call 800-490-4900