


## THRIVE™ High Mileage Engine Oils

### **Description**

**THRIVE™** High Mileage Engine Oils use an advanced passenger car motor oil technology designed to meet the needs of vehicles that have already exceeded 75,000 miles. They are formulated with the highest quality base oils combined with modern performance additives, including seal conditioners, to help prevent leaks.

**THRIVE™** High Mileage Engine Oils are formulated using a special viscosity index improver which provides excellent low temperature pump-ability during the life of the oil.

**THRIVE™** Engine Oils exceed the industry engine performance requirements for the API Engine Oil Licensing and Certification System (EOLCS). This includes industry standards API SP, and prior, and Resource Conserving and ILSAC GF-6.

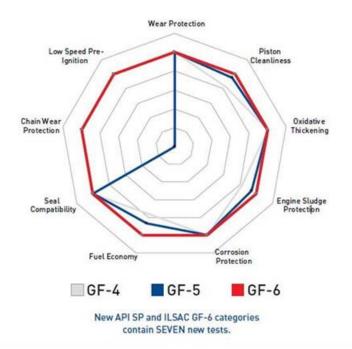

### Features/Benefits

- ✓ Advanced Cleaning Action Protects against sludge, engine rust and corrosion for peak running condition
- ✓ Advanced Oxidation Control
  Resists oil thickening under severe
  conditions, especially in low
  temperatures for protection during
  cold starts
- ✓ Advanced Heat Protection Anti-oxidants help maintain oil efficacy even under extreme heat
- Advanced Viscosity Control
   Fights viscosity breakdown for optimal lubricant circulation and performance
- ✓ Advanced Emission Control Protects emissions control system catalysts for a cleaner environment
- ✓ **Incredible Warranty** 10-year/300,000 mile warranty program to attract new business and build loyalty
- Exceptional Value
   Excellent fuel economy and a premium quality product without the national brand price





# **THRIVE™ High Mileage Engine Oils**

### **Applications**

**THRIVE™** High Mileage Engine Oils meet the API requirements for API SP, and prior, and ILSAC GF-6 and Resource Conserving. They are recommended for higher mileage (generally more than 75,000 miles) gasoline fueled automobiles and light duty trucks requiring an API SN, SM, SL or SJ product.

Performance Properties				
Product Number	Viscosity Grade	Industry Performance Standards		
017	5W-20	API SP, GF-6A		
016	10W-30	API SP, GF-6A		
015	5W-30	API SP, GF-6A		

Property	High Mileage 5W-20	High Mileage 5W- 30	High Mileage 10W-30
Viscosity @100C CST	8.79	10.53	10.56
Viscosity @40 CST	52.39	65.57	66.18
Viscosity Index	147	149	148
Specific Gravity	0.85795	0.8576	0.86435
Pour Point C	-45	-45	-43.5
Flash Point C	315	22	315.5
Color ATSM	3	3	3
CCS	5150	6400	4000
Noack Volatility	12.35	1.20	11.95
TBN	7.00	7.00	7.00

### For Complete Engine Health™

For more information, visit www.uslube.com or call 800-490-4900.

